



SONIYA ENTERPRISES

INTRODUCTION

“Soniya Conveyor Belts ensures safe transportation of lifting & unloading of materials, in a way, the nylon or polyester textile carcass fabric plies are bonded with synthetic rubber compound, belting rubber covers are made of anti-abrasive, high tensile strength quality M-24 or N grade suitable for carrying lumps or fine dust at ambient temperature, rubber grade .It’s a pity to see that some machines completely fail resulting in to disastrous consequences for machine manufacturer. Due to improper utilization, wrong selection & substandard products, there are heavy losses at user end. This happens as traders fall prey to price sensitive market for an immediate business gain, due to lack of requisite technical backup and a will for long term business strategy and investments.


Not mere a quality replacement belt , but may be you need to consider for a complete belting solution .We at **SONIYA ENTERPRISES** stand for high tech belting mechanisms , with all needed backup and expertise. Products specialization is a must.—not mere a trade setup offering bunch of all hardware off the shelf — but you need the people who understand and stand behind”

Thanking you.

With best regards,

SONIYA ENTERPRISES

Website:- www.soniyaenterprises.com

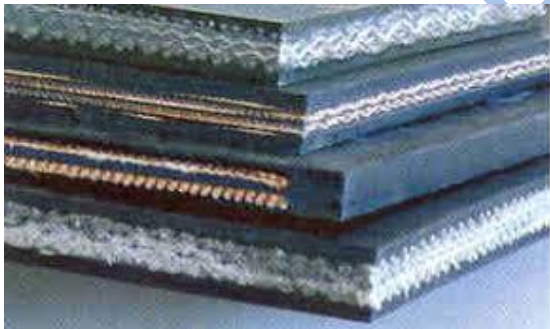

- **Address - MIG-1/41 Amdi Nagar Hudco Near By D.A.V Public School ,Bhilai code-490009**
- **Dist - Durg(C.G)**
- **Mobile no. - 09300070286,09300050760, 09755098552**
- **Email Id – soniya.belts@gmail.com,soniya.enterprise@gmail.com**



SONIYA ENTERPRISES

SPECIFICATION OF CONVEYOR BELT

We offer wide range of conveyor belting from 100 mm width to 2400mm width. Our conveyor grades are :-

- M-24 Grade
- HEAT RESISTANCE (75c to 150c)
- SUPERIOUR HEAT RESISTANCE (150c to 200c)
- ULTRA HEAT RESISTANCE (UP TO 250c TEMP)
- FIRE RESISTANCE (UP TO 360c TEMP)
- OIL RESISTANCE

White Hygienic Conveyor Belt. We offer special range of steel cord conveyor belting like side wall, chevron belting conveyor.



CONVEYOR BELT

SPECIFICATION OF CHEVRON BELT

These industrial chevron belt mostly used in concrete batching plants, stone quarries, road scalpers, truck / wagon loading system, etc.

Our industrial chevron belt get inclined up to 35-40 deg may be achieved.

These belts are highly durable and have excellent application in the Construction Industry. CHEVRON belting are 15mm high in V, Y, U PROFILS in dai-moulded. Offered at competitive rates. Most important advantage of CHEVRON BELTING is due to high angles of inclination is that less space is needed to archive the required conveyor height and also reduces the cost of the system. Standard width of chevron belting is from 490 mm wide to 800m wide (higher width can be offered on request).



CHEVRON BELT

TYPES OF CHEVRON BELTS ARE :-

